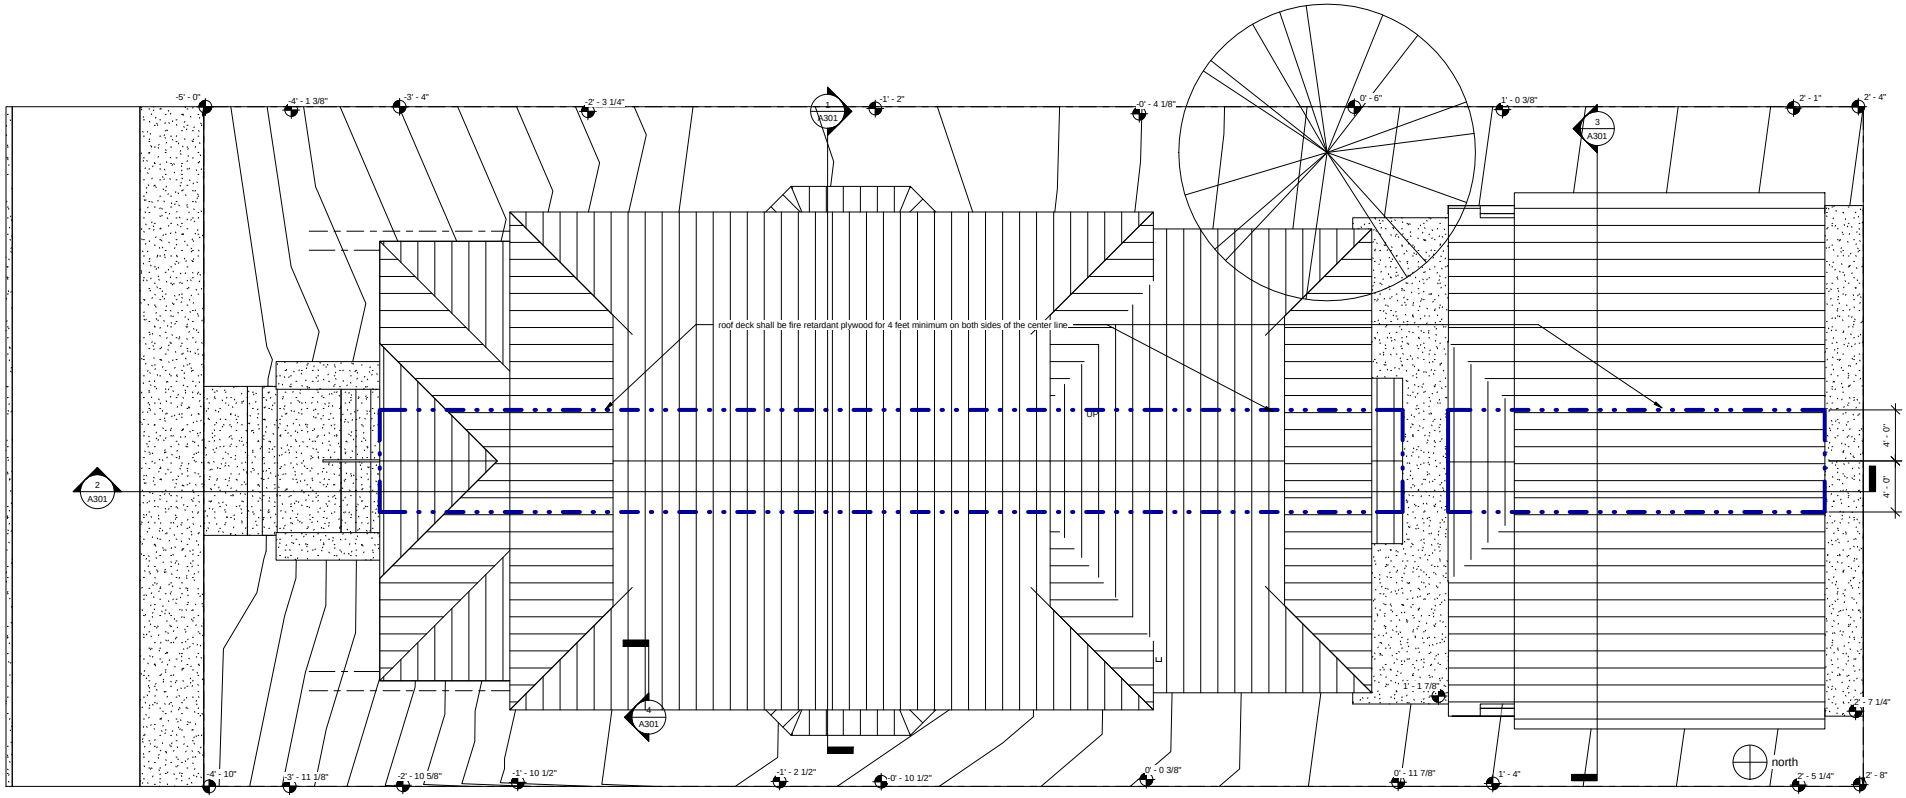
roof deck shall be fire retardant plywood for 4 feet minimum on both sides of the center line
UP
north
-5' - 0"
-4' - 1 3/8"
-3' - 4"
-2' - 3 1/4"
-1' - 2"
-0' - 4 1/8"
0' - 6"
1' - 0 3/8"
2' - 1"
2' - 4"
-4' - 10"
-3' - 11 1/8"
-2' - 10 5/8"
-1' - 10 1/2"
-1' - 2 1/2"
-0' - 10 1/2"
0' - 0 3/8"
0' - 11 7/8"
1' - 4"
1' - 1 7/8"
2' - 5 1/4"
2' - 7 1/4"
2' - 8"
4' - 0"
4' - 0"
1
A301
2
A301
3
A301
4
A301

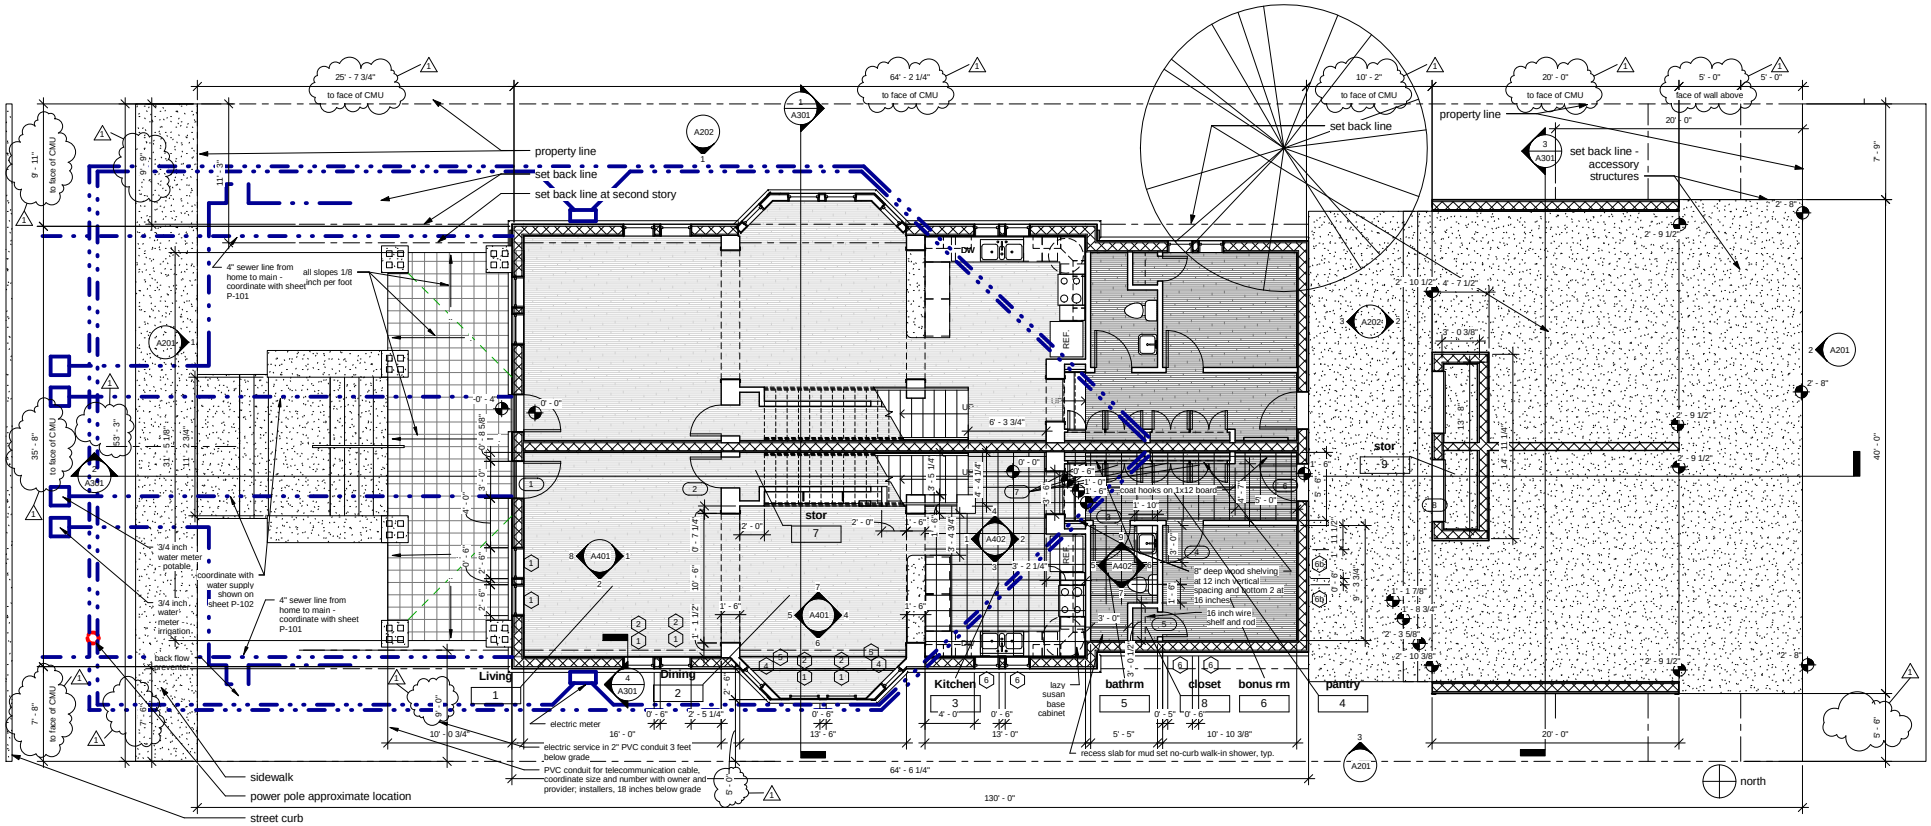
25' - 7 3/4"
to face of CMU
64' - 2 1/4"
to face of CMU
10' - 2"
to face of CMU
20' - 0"
to face of CMU
5' - 0"
face of wall above
property line
set back line
set back line at second story
set back line
property line
set back line - accessory structures
4" sewer line from home to main - coordinate with sheet P-101
all slopes 1/8 inch per foot
3/4 inch water meter - potable
coordinate with water supply shown on sheet P-102
4" sewer line from home to main - coordinate with sheet P-101
3/4 inch water meter - irrigation
back flow preventer
Living
Dining
stor
Kitchen
bathrm
closet
bonus rm
pantry
stor
coat hooks on 1x12 board
8" deep wood shelving at 12 inch vertical spacing and bottom 2 at 16 inches
16 inch wire shelf and rod
lazy susan base cabinet
recess slab for mud set no-curb walk-in shower, typ.
electric meter
electric service in 2" PVC conduit 3 feet below grade
PVC conduit for telecommunication cable, coordinate size and number with owner and provider; installers, 18 inches below grade
sidewalk
power pole approximate location
street curb
16' - 0"
13' - 6"
13' - 0"
5' - 5"
10' - 10 3/8"
64' - 6 1/4"
130' - 0"
20' - 0"
40' - 0"
35' - 8"
10' - 0 3/4"
north